
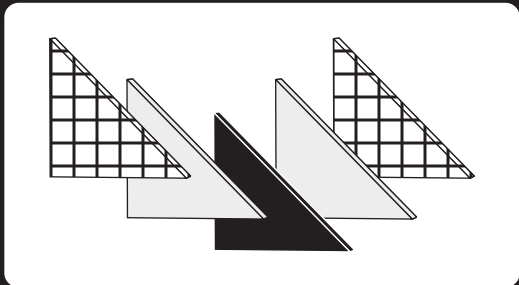


# ALLIED PROTECTIVE GLAZING LLC

A Member of the LTI Group

www.APGlazing.com

## CONTAINMENT GRADE SYMMETRICAL LAMINATE



Note: This product has wired glass on both surfaces and it is impossible to line up the wire glass up perfectly.

## PRODUCT DETAILS\*

PART NUMBER	GCPFR0850
THICKNESS	0.850 (+/- 1/16")
GROOVE WIDTH = THICKNESS + 1/10"	

\*Represents typical properties, not intended for specification

## TESTING PROTOCOLS

STANDARD USED	RESULT
ASTM F1915	GRADE 4
HP WHITE TP0500.03	LEVEL 1
UL 9, UL 10B and UL 10C	REFER TO UL FILE: KCMZ.R26581

## GLAZING INFORMATION

Refer to UL File KCMZ.R26581

Refer to GANA glazing manual for general instruction information A copy of LTI's installation instructions with detail will be included with your order. To receive a copy please call LTI Smart Glass at 1+413.637.5001

**Glazing compound: Use Only Model Metacaulk Blaze Seal, Model Metacaulk 990, Metacaulk 950**

GCPFR00850 is rated for the following:

Rating Min	Application	Max Exposed (Sq In)	Max Width Exposed Glz In	Max Height Exposed Glz In
45	Window, Transom, Sidelight	1744	42	42
45	Swinging Hollow Metal Door	1344	42	42
90	Swinging Hollow Metal Door	100	3	33

## DESCRIPTION

A symmetrical composite of two clear polished UL rated and UL listed wire glass lites laminated to an 1/4" Makrolon® polycarbonate core with two layers of adhesive inter-layer. All LTI Security Products are custom manufactured to be utilized in secure environments where consistent quality and optimum optical clarity are priorities. Available in clear or tints.

The SMARTGARD-GCPFR0850 has an overall thickness of: 0.850 (+/- 1/16")

## STANDARDS

ANSI Z97.1  
 CPSC 16 CFR 1201 Category I & II  
 ASTM C 1349  
 UL 9 & UL 10B  
 UL 972

## OEM MANUFACTURER

**LTI SMART GLASS, INC.**  
 LENOX, MASS. +1.413.637.5001  
 PITTSFIELD, MASS +1.413.637.5001



www.APGlazing.com

14 Federico Drive  
 Pittsfield, MA 01201

+1 413.637.5001 FX: +1 413.637.5004

### Please Read:

Allied Protective Glazing LLC and/or Sheffield Plastics Inc. will not be responsible for the use of this information relative to actual application. Users must make their own determination of its suitability for their specific application. No warranty is made for the fitness of any product, and nothing herein waives any of the seller's conditions of sale.